


Ice Cube and Water Dispenser AKD125

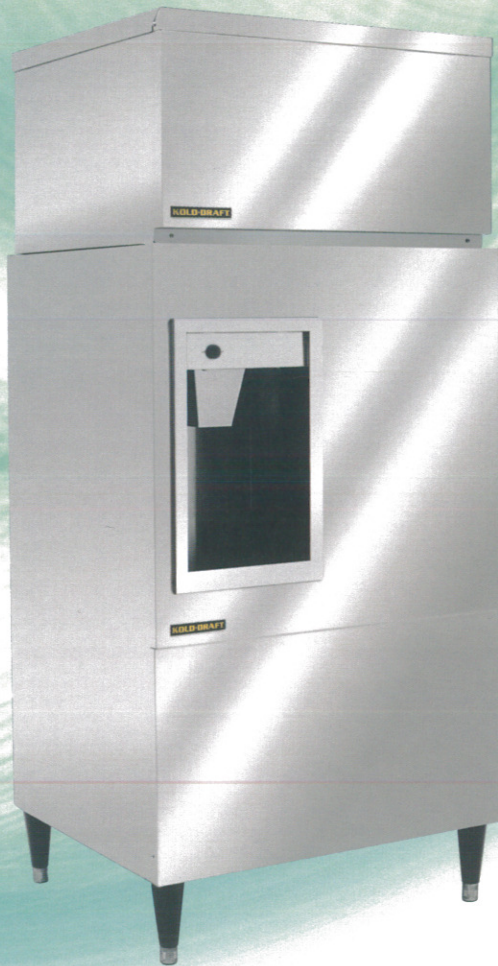

SHOWN WITH GT360 SERIES ICE MACHINE

On Demand

Fill 'em up. Where on-demand ice and water are needed, the KOLD-DRAFT AKD125 Automatic Ice Cube and Water Dispenser is the solution. Ideal for hospitals, training facilities, clinics, nursing homes, hotels, resorts, and schools, the AKD125 features one-hand, pushbutton dispensing for ease of operation when filling containers and ice buckets. For cool, clear ice water, an optional water valve and tapered ice spout facilitate glass filling.



Full Cube
1-1/4" x 1-1/4" x 1-1/4"



Half Cube
1-1/4" x 5/8" x 1-1/4"

The auger feed mechanism prevents the waste, spillage, and splashing problems caused by gravity dump machines. When demand for ice is low, an optional thermostatically controlled ice agitator keeps the ice in the bin in small dispensable pieces. Like all KOLD-DRAFT equipment, the AKD125 features corrosion-resistant stainless steel exterior and frame.

KOLD-DRAFT ice machines feature a unique "upside-down" horizontal evaporator and water plate assembly. As water is sprayed upward into the evaporator cells, the pure water freezes first while particulates and air are forced out and dumped at the end of each cycle. This leaves only perfect crystal-clear cubes, nearly as pure as distilled water. **Maintenance is easy, and the AKD125 is armed with our 3-year "bumper-to-bumper" warranty on all parts and labor.**



Intertek



IT'S NICE TO BE NOTICED™

1525 E. Lake Road • Erie, PA 16511 • 800.840.9577 • fax 800.548.9392 • www.kold-draft.com

KOLD-DRAFT

ice machines • bins • baggers • crushers • dispensers

AKD125 ICE CUBE AND WATER DISPENSER

Exterior:

All stainless steel standard.

Interior:

Rotationally molded polyethylene.

Plumbing Connections:

Two 3/4" I.D. flex tubing or drains.
Bin drain is isolated for sanitation.

Electrical:

7/8" diameter opening for conduit fitting. Field connection access on rear panel.

Motor:

PSC type with automatic thermal overload.

Storage Capacity:

Approx. 125 lbs. (56.67 kg)

Insulation:

Polyurethane foam.

Ice Agitation:

We recommend agitation to keep the ice in small, dispensable pieces when the AKD is not in use for long periods of time. The optional field-installed agitation kit is 102116901.

Mechanism:

Motor-driven auger.

Loading:

Installation must include **KOLD-DRAFT** Classic GT Series Ice Cuber.

Spout:

Universally sized for glass filling and bucket filling.

Operation:

Dispensing is continuous when push-button is held.

Water/Glass Filler Option:

Requires a separate portable water line 1/2" F.P.T. connection. The optional field-installed filler kit is 103100101.

General Specifications for AKD125 Dispenser

| Model Number | Rated Storage Capacity | Voltage Characteristics | Number of Wires Plus Ground | FLA | HP |
|--------------|------------------------|-------------------------|-----------------------------|-----|------|
| AKD125 | 125 lbs. (56.7 kg) | 115-60-1 | 2 | 1.9 | 1/12 |

Note: Electrical specifications are sized for within 80 ft. or less. All AKD125s should be wired on a separate circuit.

Clearance Requirements:

Allow clearance at back for connections. See Ice Maker specifications for ventilation clearance requirements.

We reserve the right to make product improvements at any time. Specifications and design are subject to change without notice.

Dimensions/Weight

| Description | Dimensions - inches (cm) | | | Ship Weight # (kg) |
|-------------|--------------------------|--------------|------------|--------------------|
| | W | D | H | |
| AKD125 | 30.125 (76.5) | 25.25 (64.1) | 44.5 (113) | 169 (77) |

